



FIBER SPECIFICATIONS					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FT400UMT	400 ± 8 μm	425 ± 10 μm	730 ± 30 μm	0.39	300 nm - 1200 nm

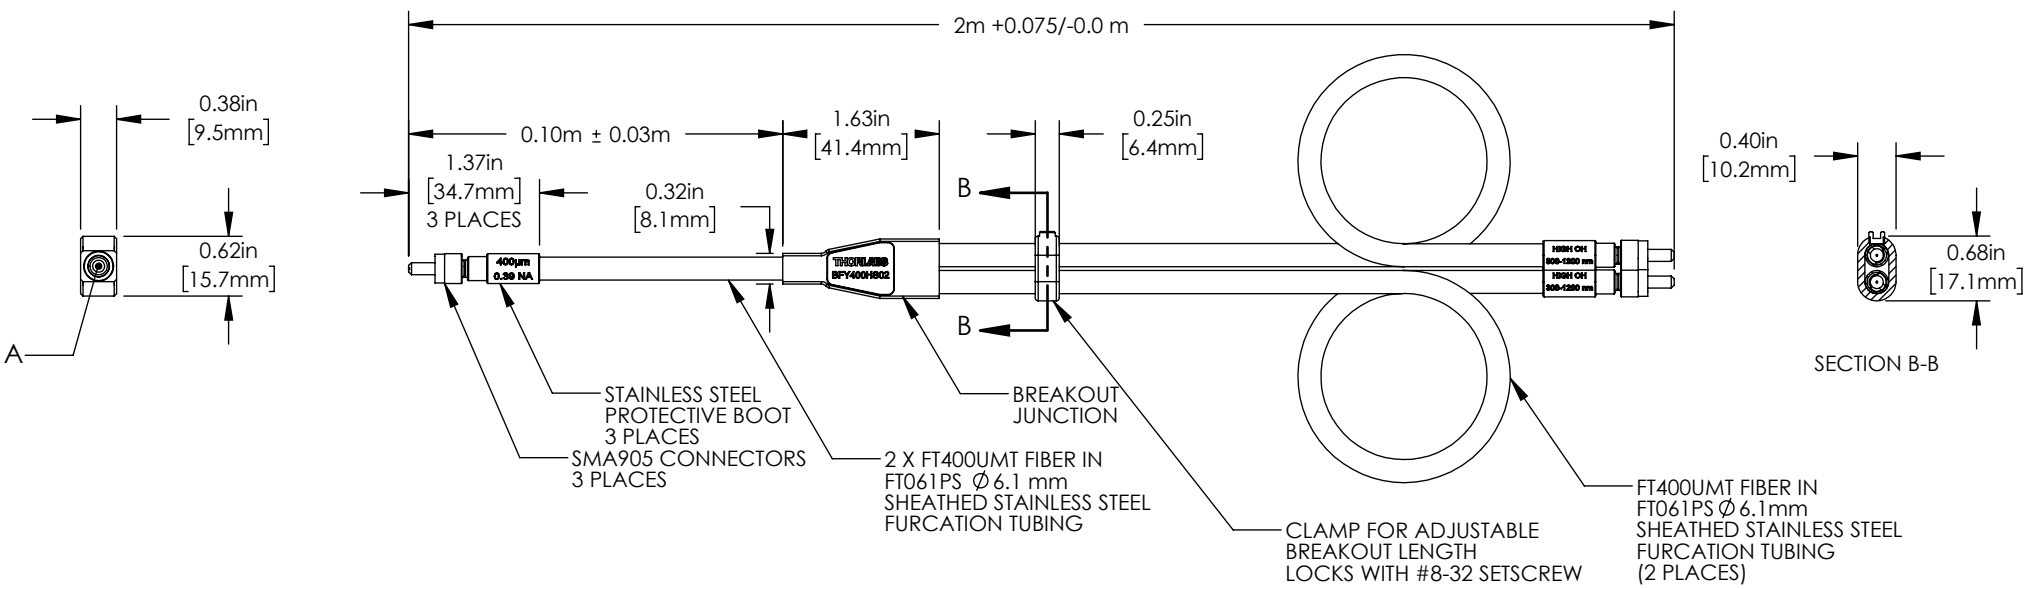

DETAIL A
SCALE 32 : 1
FRONT VIEW OF COMMON END

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION				THORLABS www.thorlabs.com	
NAME	DATE	BIFURCATED CABLE, TWO 400 μm, 0.39 NA, HIGH OH FIBERS SMA, 2 m			
DRAWN	PH	12/17/2013	MATERIAL		REV
APPROVAL	BAG	12/22/2021	N/A		E
COPYRIGHT © 2021 BY THORLABS					
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS				ITEM #	APPROX WEIGHT
				BFY400HS02	0.14 kg