


FIBER SPECIFICATIONS					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FG050LGA	50 ±1 µm	125 +1/-2 µm	250 ±10 µm	0.22 ± 0.02	400 to 2400 nm

\*SPECIFICATIONS BASED ON BARE FIBER DATA

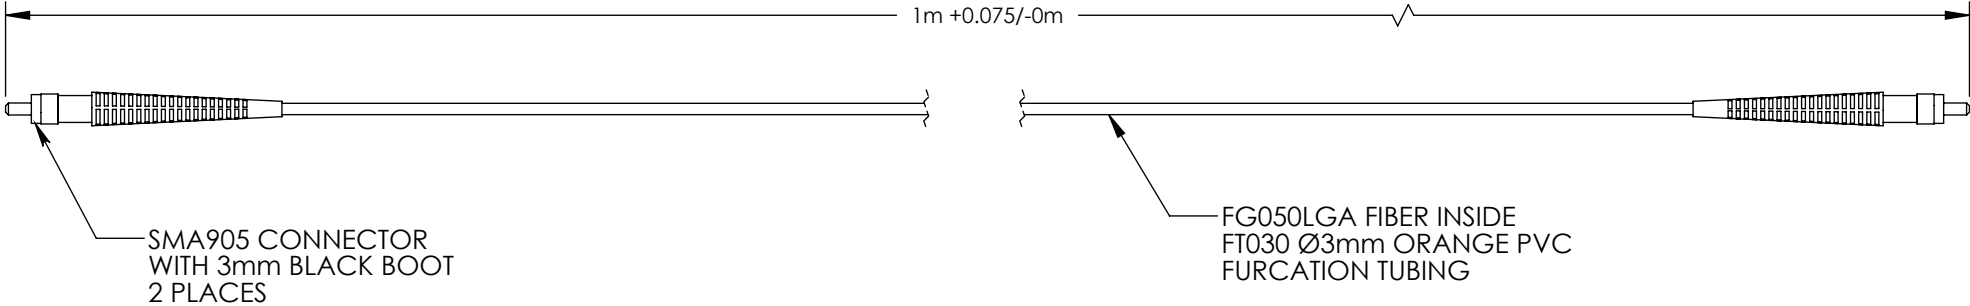

INCLUDED BUT NOT SHOWN:

- 2 RUBBER DUST CAPS

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			<div>THORLABS</div> <div>www.thorlabs.com</div>	
	NAME	DATE		
DRAWN	KH	28/JUL/11	1m, 50 µm 0.22 NA SMA CABLE	
APPROVAL	HC	19/APR/22	MATERIAL	
COPYRIGHT © 2019 BY THORLABS			N/A	
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			ITEM #	APPROX WEIGHT
			M14L01	0.02 kg