


FIBER SPECIFICATIONS*					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FG050LGA	50 ±1µm	125 +1/-2 µm	250 ±10 µm	0.22 ± 0.02	400 to 2400 nm


*SPECIFICATIONS BASED ON BARE FIBER DATA

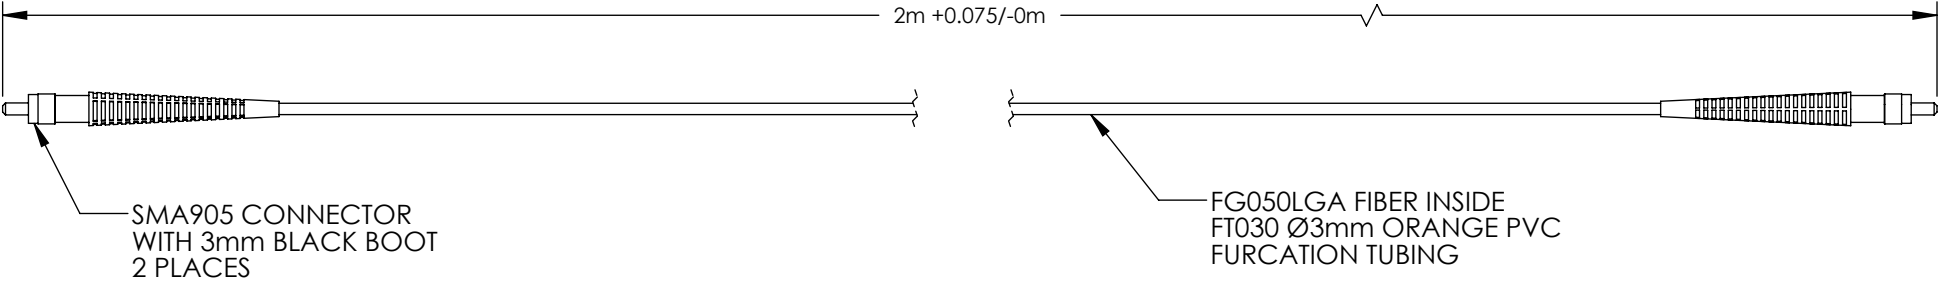

INCLUDED BUT NOT SHOWN:

- 2 RUBBER DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLABS www.thorlabs.com		
	NAME	DATE	2m, 50 μm 0.22 NA SMA TO SMA CABLE		
DRAWN	KH	28/JUL/11			
APPROVAL	HC	19/APR/22			
COPYRIGHT © 2019 BY THORLABS			MATERIAL		REV F
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			ITEM # M14L02		APPROX WEIGHT 0.02 kg