
FIBER SPECIFICATIONS*								
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE			
FG105LCA	105 +1/-3 µm	125 +1/-2 µm	250 ±10 μm	0.22 ± 0.02	400 to 2400 nm			
*SPECIFICATIONS BASED ON BARE FIBER DATA								

TECHTO, MICHOED BY NOED CITY BY METIBER BY MY

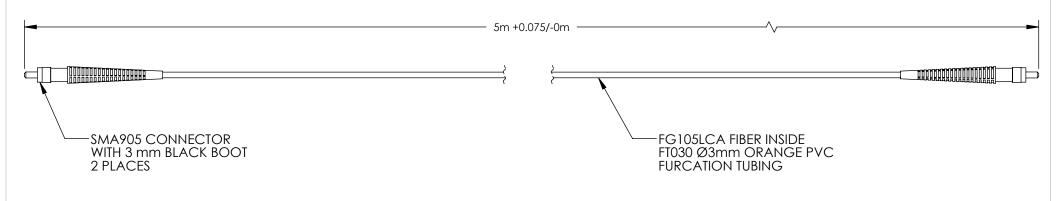

INCLUDED BUT NOT SHOWN:

2 RUBBER DUST CAPS

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECT						
DRAWN						
APPROVAL						
COPYRIG	COPYRIGH					
VALUES IN P	VALUES IN PA					

THOR LAB	G TION ()	
	DATE	NAME
5m 105 um 0 22 NA SM	00/11/1/12	1711

NAME	DATE	5m, 105 μm 0.22 NA SMA CABLE		
KH	28/JUL/11	5m, 105 μm 0.22 NA SMA CABLE		
AL	HC	19/APR/22	MATERIAL	REV
FRIGHT © 2019 RV THORIABS	N/A	F		

COPYRIGHT © 2019 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

N/A F M15L05 APPROX WEIGHT 0.04 kg