


FIBER SPECIFICATIONS*					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FT400EMT	400 ± 8 µm	425 ± 10 µm	730 ± 30 µm	0.39	400 - 2200 nm


*FIBER SPECIFICATIONS BASED ON BARE FIBER DATA

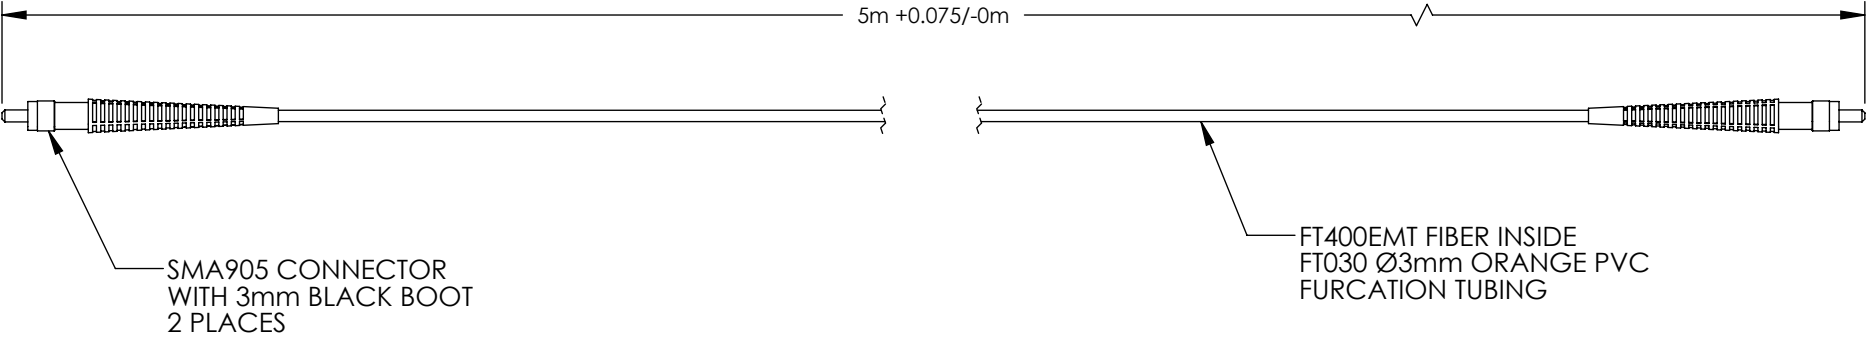

INCLUDED BUT NOT SHOWN:

- 2 RUBBER DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			 www.thorlabs.com	
	NAME	DATE		
DRAWN	KH	20/JUL/11	5m, 400 µm 0.39 NA SMA TO SMA CABLE	
APPROVAL	BAG	06/FEB/19	MATERIAL	REV
COPYRIGHT © 2019 BY THORLABS			N/A	C
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			ITEM #	APPROX WEIGHT
			M28L05	0.04 kg