


FIBER SPECIFICATIONS*					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FT600EMT	600 ± 10 μm	630 ± 10 μm	1040 ± 30 μm	0.39	400 - 2200 nm

*SPECIFICATIONS BASED ON BARE FIBER DATA

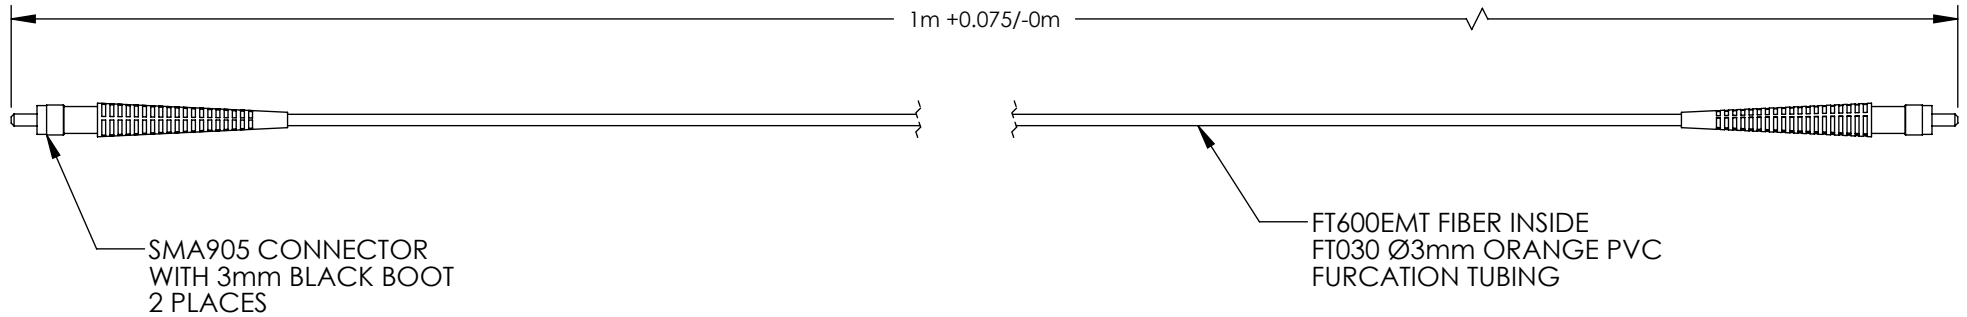

INCLUDED BUT NOT SHOWN:

- 2 RUBBER DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLABS www.thorlabs.com	
	NAME	DATE	1m, 600μm, 0.39 NA, SMA TO SMA CABLE	
DRAWN	KH	20/JUL/11		
APPROVAL	BAG	06/FEB/19	MATERIAL	REV
COPYRIGHT © 2019 BY THORLABS			N/A	C
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS		ITEM #	M29L01	APPROX WEIGHT
				0.02 kg