


FIBER SPECIFICATIONS*					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FT600EMT	600 ± 10 μm	630 ± 10 μm	1040 ± 30 μm	0.39	400 - 2200 nm

\*SPECIFICATIONS BASED ON BARE FIBER DATA

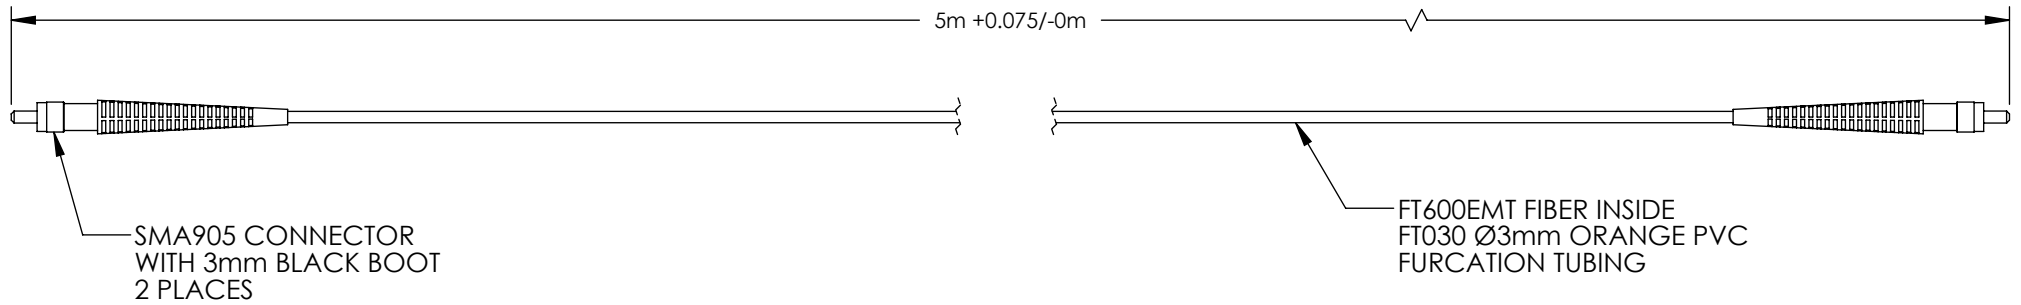

INCLUDED BUT NOT SHOWN:

- 2 RUBBER DUST CAPS

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			<b>THORLABS</b> www.thorlabs.com	
NAME	DATE	5m, 600μm, 0.39 NA, SMA TO SMA CABLE		
DRAWN	KH	20/JUL/11	REV C	
APPROVAL	BAG	06/FEB/19	MATERIAL	N/A
COPYRIGHT © 2019 BY THORLABS			ITEM #	M29L05
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			APPROX WEIGHT	0.04 kg