


FIBER SPECIFICATIONS					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
GIF625	$62.5 \pm 2.5 \mu\text{m}$	$125 \pm 1 \mu\text{m}$	$245 \pm 10 \mu\text{m}$	0.275 ± 0.015	800 to 1600 nm

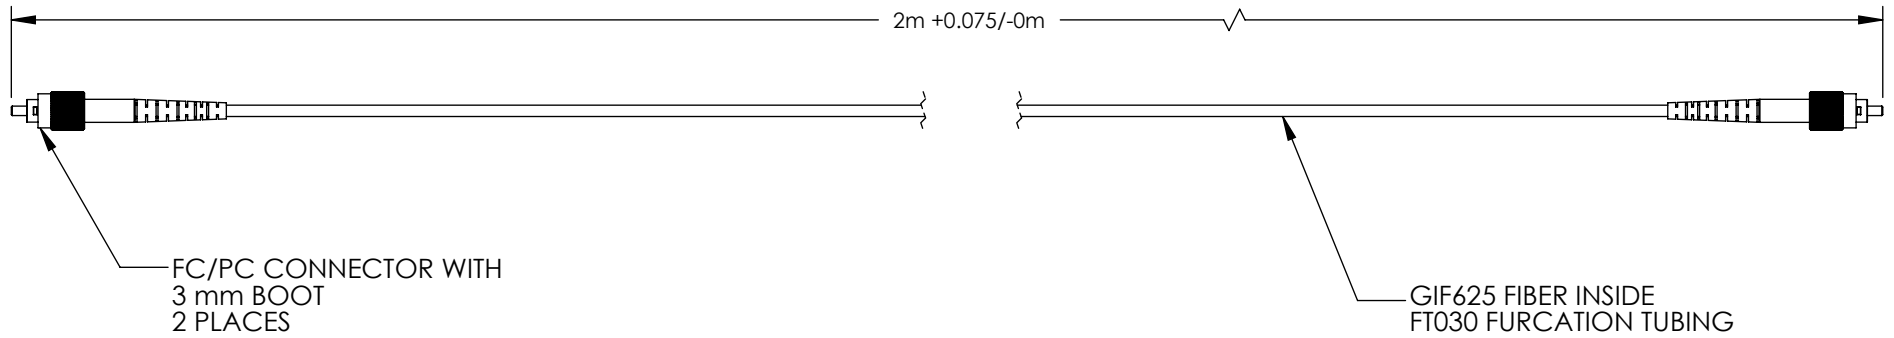

FC/PC CONNECTOR WITH
3 mm BOOT
2 PLACES

GIF625 FIBER INSIDE
FT030 FURCATION TUBING

INCLUDED BUT NOT SHOWN:

- TWO PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLABS www.thorlabs.com	
NAME	DATE	2m, 62.5 μm , 0.275 NA, GRADED INDEX, FC/PC TO FC/PC CABLE		
DRAWN	KH	28/JUL/11	MATERIAL	
APPROVAL	BAG	06/JUN/18	N/A	REV D
COPYRIGHT © 2018 BY THORLABS			ITEM #	APPROX WEIGHT
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			M31L02	0.02 kg