


FIBER SPECIFICATIONS*						
FIBER TYPE	OPERATING WAVELENGTH	CUTOFF WAVELENGTH	MODE FIELD DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA
SM600	633 - 780 nm	500 - 600 nm	3.6 - 5.3 μm @ 633 nm	125 \pm 1.0 μm	245 \pm 15 μm	0.10 - 0.14

*SPECIFICATIONS BASED ON BARE-FIBER DATA

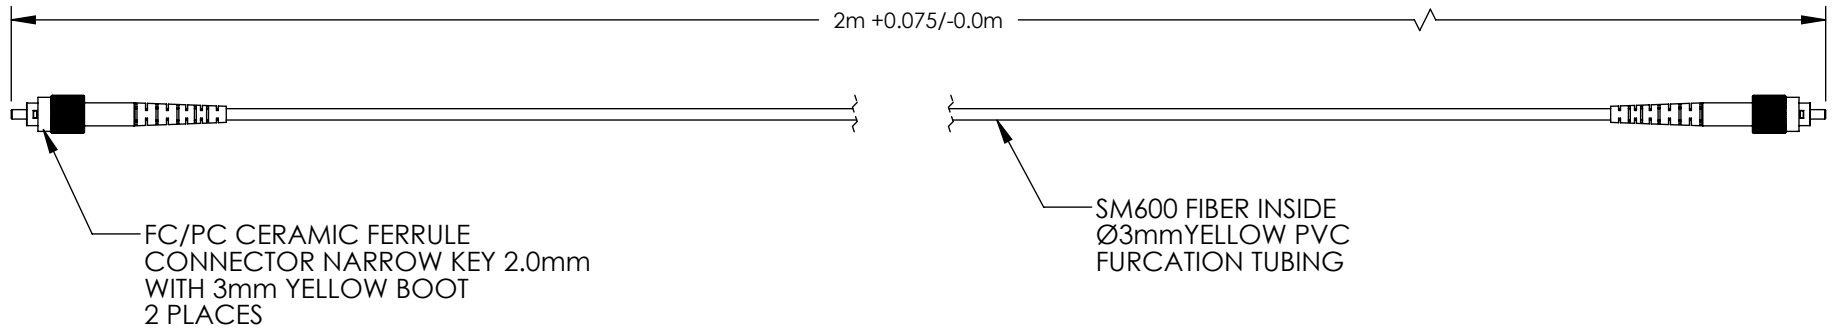

INCLUDED BUT NOT SHOWN:
• 2 PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLABS www.thorlabs.com	
NAME	DATE	2m, 630nm, FC/PC TO FC/PC CABLE		
DRAWN	KH	14/JUL/11	MATERIAL	
APPROVAL	BAG	02/DEC/19	N/A	
COPYRIGHT © 2019 BY THORLABS			ITEM #	APPROX WEIGHT
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			P1-630A-FC-2	0.02 kg