


FIBER SPECIFICATIONS*						
FIBER TYPE	OPERATING WAVELENGTH	CUTOFF WAVELENGTH	MODE FIELD DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA
SMF-28ULTRA	1260-1625nm	<1260nm	9.2 ± 0.4 μm @ 1310 nm 10.4 ± 0.5 μm @ 1550 nm	125 ± 0.7μm	242 ± 5μm	0.14

*SPECIFICATIONS BASED ON BARE-FIBER DATA.

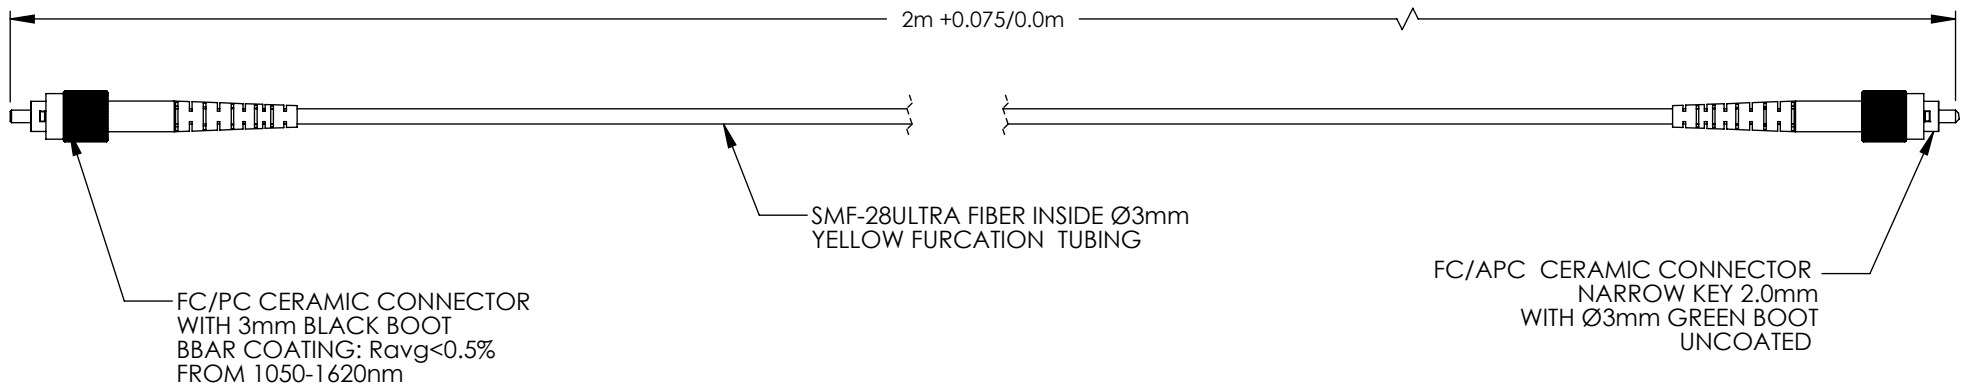

INCLUDED BUT NOT SHOWN:
• 2 PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLABS www.thorlabs.com	
NAME	DATE	SM CABLE, 2m, FC/APC TO AR COATED FC/PC FOR 1050-1620nm		
DRAWN	JW	20/JUL/12	MATERIAL	REV
APPROVAL	BAG	26/SEPT/19	N/A	G
COPYRIGHT © 2018 BY THORLABS				
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS		ITEM #	APPROX WEIGHT	
		P5-SMF28EAR-2	0.05 kg	