


**NOTES:**

**DO NOT SCALE**

8-32 UNC (M4)  
POST MOUNTING

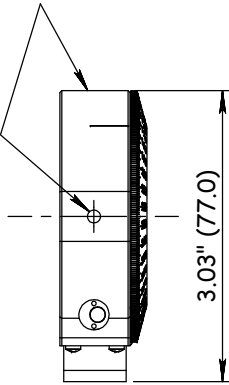

3.03" (77.0)

4 x 6-32 UNC (M3)

4 x 8-32 UNC (M4)

1.18" (30) typ

1.18" (30.0) typ

SM1 THREAD  
THROUGH

4 x 4-40 UNC  
FOR CAGE MOUNTING.

0.07" (1.8)

0.49" (12.5)

0.87 (22.0) typ

1.67" (42.5)

0.49" (12.5)

2 x C' BORE FOR  
1/4-20 CAP SCREW (M6)

8-32 UNC (M4) FOR VERTICAL  
POST MOUNTING

8-32 UNC (M4) FOR INCLINED  
POST MOUNTING.

CABLE 10' (3.0M)

0.9" (23.0)

4.89" (124)

**THORLABS**

COPYRIGHT © THORLABS  
ALL RIGHTS RESERVED  
NO UNAUTHORISED DUPLICATION  
OR MANUFACTURE PERMITTED

TITLE				<b>PRM1-Z7</b>	
MATERIAL				ALUMINIUM	
TREATMENT				BLACK ANODISE	
FINISH				BLACK ANODISE	
DATE	31/07/2007	DWG			ISSUE
					1
DRAWN	GC	APPD.	SCALE	1:2	A4 SHEET 1 OF 1

X	XXXXX	XXXXX
ISSUE	C/N NUMBER	DATE
TOLERANCES X=±1 X.X=±0.25 X.XX=±0.1		ALL DIMENSIONS IN MILLIMETRES
ANGULAR=±0°30'		
THIRD ANGLE PROJECTION DRAWN TO BS.308		

